
HOSHIZAKI

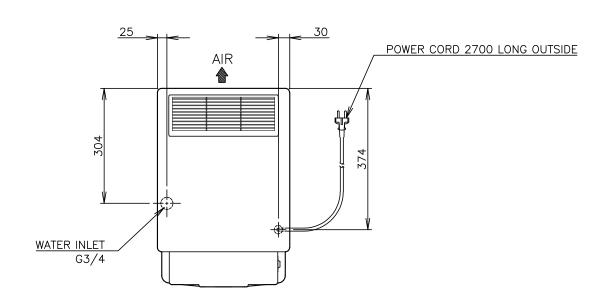

OPERATING CONDITION

Ambient Temp.: 5-40°C, Water Supply Temp.: 5-35°C

Water Supply Pressure: 0.05-0.78MPa

Voltage Range: Rated Voltage±6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided

2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.

3. The amperage and electric consumption are based on measurements with the ice dispensing solenoid off.

4. Product Code: L030

L030-C101 L030-C301 ITEM Hoshizaki Cubelet Ice Dispenser MODEL DCM-60KE-HC 1 Phase 220-240V 50Hz POWER SUPPLY Capacity: 0.67kVA(2.8A) **AMPERAGE** Rated: 1.5A Starting: 10.2A ELECTRIC 265W (Power Factor: 73%) CONSUMPTION Approx. 60kg (AT. 10°C, WT. 10°C) ICE PRODUCTION Approx. 50kg (AT. 21°C, WT. 15°C) PER 24h Approx. 38kg (AT. 32°C, WT. 21°C) SHAPE OF ICE Cubelet (Compressed Flake Ice) STORAGE CAPACITY Approx. 1.9kg Approx. 78cups/30min (AT. 10°C, WT. 10°C) Approx. 110cups/1hour(AT. 10°C, WT. 10°C) Approx. 73cups/30min (AT. 21°C, WT. 15°C) ICE DISPENSING RATE (40g/CUP) Approx. 99cups/1hour (AT. 21°C, WT. 15°C) Approx. 67cups/30min (AT. 32°C, WT. 21°C) Approx. 87cups/1hour (AT. 32°C, WT. 21°C) Approx. 0.060m³ (AT. 10°C, WT. 10°C) WATER CONSUMPTION Approx. 0.050m³(AT. 21°C, WT. 15°C) PER 24h Approx. 0.038m³ (AT. 32°C, WT. 21°C) OUTSIDE DIMENSIONS | $350 \text{mm}(\text{W}) \times 585 \text{mm}(\text{D}) \times 695 (\sim 710) \text{mm}(\text{H})$ INSULATION FOAM HFC-free **BLOWING AGENT** HEAT REJECTION 450W (AT. 32°C, WT. 21°C) Stainless Steel(Side, Rear) EXTERIOR ABS Molding(Front, Top, Drain Pan) Thin ice forming inside Cylinder ICE MAKING SYSTEM Y-Type Connection CONNECTIONSwith CONT. Plug (L030) with UK. Plug (L030-C101) **ELECTRIC** with CHINA Plug (L030-C301) CONNECTIONS-Direct Connection to Water Main, Inlet G3/4(Bottom) WATER SUPPLY CONNECTIONS-DRAIN Drain Hose, I.D. ≠ 25mm(Bottom) HARVESTING SYSTEM Direct driven Auger Push Lever and Solenoid (with Select Switch) ICE DISPENSING SYSTEM Portion control by Dispense Switch WATER DISPENSING Push Lever and Water Valve (with Select Switch) SYSTEM COMPRESSOR Hermetic CONDENSER | Fin and Tube type, Air-cooled EVAPORATOR Tube coiled around Cylinder (Solder Plated) REFRIGERANT R290/85q BIN CONTROL Mechanical Bin Control (Time Delay Controlled) ICE MAKING Float Switch and Water Valve WATER CONTROL ELECTRICAL CIRCUIT 10A Circuit Breaker PROTECTION REFRIGERANT CIRCUIT Compressor Internal Thermostat PROTECTION Condensing Temperature detected by Thermistor(Auto-reset) ICE MAKER Shutdown by Microprocessor (Manual-reset) **PROTECTION** Carton $440 \text{mm}(W) \times 655 \text{mm}(D) \times 906 \text{mm}(H)$ PACKAGE WEIGHT 46kg (Gross: 55kg) ACCESSORIES Installation Kit, Brush

350 →	585 →
SERVICE CALL LAMP AIR AIR AIR AIR	OPERATION SWITCH
AIR ICE SWITCH ICE&WATER SWITCH WATER SWITCH WATER SWITCH	ICE MAKING SWITCH
PUSH LEVER 90Z 98	130
23.5 303 23.5	380 3444
	DRAIN HOSE L1000 (I.D. \$\phi\$ 25)

HOSHI7AKI	CURFLET	ICF	DISPENSER		60KF-	-HC
HUSHILANI	CUDLLLI		DIOLFINOLIV	$D\cup M$	UUNL	- I I U