
HOSHIZAKI

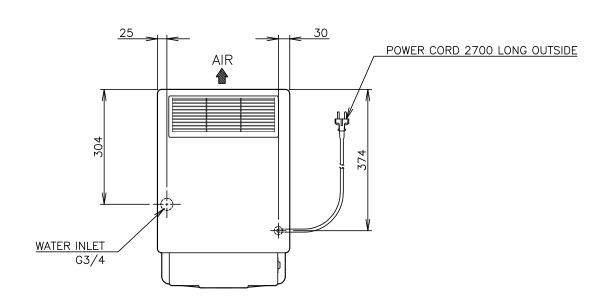

Ambient Temp.: 5-40°C, Water Supply Temp.: 5-35°C


OPERATING CONDITION Water Supply Pressure: 0.05-0.78MPa

Voltage Range: Rated Voltage±6%

*We reserve the right to make changes in specifications and design without prior notice.

- 1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.
- 2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
- 3. The amperage and electric consumption are based on measurements with the ice dispensing solenoid off.
- 4. Product Code: L031 L031-C101

L031-C301

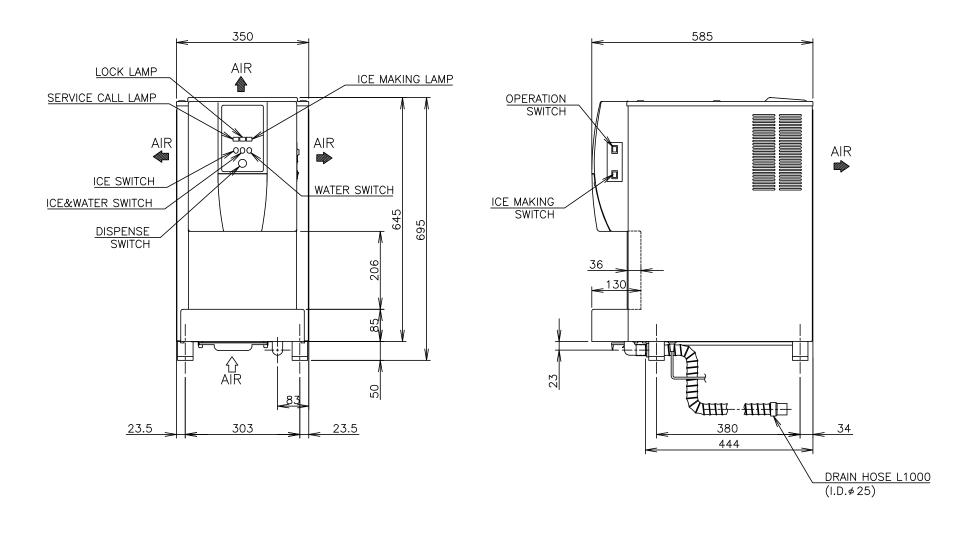

_			_
7	ITEM	Hoshizaki Cubelet Ice Dispenser	
Ī	MODEL	DCM-60KE-P-HC]
ĺ	POWER SUPPLY	1 Phase 220—240V 50Hz Capacity: 0.67kVA (2.8A)	1/2
İ	AMPERAGE	Rated: 1.5A Starting: 10.2A	1/2
İ	ELECTRIC		1
L	CONSUMPTION	265W (Power Factor: 73%)	1/2
	ICE PRODUCTION PER 24h	Approx. 60kg (AT. 10°C, WT. 10°C) Approx. 50kg (AT. 21°C, WT. 15°C) Approx. 38kg (AT. 32°C, WT. 21°C)	
t	SHAPE OF ICE	Cubelet (Compressed Flake Ice)	1
ł	STORAGE CAPACITY	Approx. 1.9kg	1
	ICE DISPENSING RATE (40g/CUP)	Approx. 78cups/30min (AT. 10°C, WT. 10°C) Approx. 110cups/1hour(AT. 10°C, WT. 10°C) Approx. 73cups/30min (AT. 21°C, WT. 15°C) Approx. 99cups/1hour (AT. 21°C, WT. 15°C) Approx. 67cups/30min (AT. 32°C, WT. 21°C) Approx. 87cups/1hour (AT. 32°C, WT. 21°C)	=
	WATER CONSUMPTION PER 24h	Approx. 0.060m³(AT. 10°C, WT. 10°C) Approx. 0.050m³(AT. 21°C, WT. 15°C) Approx. 0.038m³ (AT. 32°C, WT. 21°C)	
f	OUTSIDE DIMENSIONS	350mm(W)×585mm(D)×695(~710)mm(H)	1
	INSULATION FOAM BLOWING AGENT	HFC-free	
	HEAT REJECTION	450W (AT. 32°C, WT. 21°C)	1/2
	EXTERIOR	Stainless Steel(Side, Rear) ABS Molding(Front, Top, Drain Pan)	
	ICE MAKING SYSTEM	Thin ice forming inside Cylinder	
	CONNECTIONS-	Y—Type Connection with CONT. Plug (L031) with UK. Plug (L031—C101)	
	ELECTRIC	with CHINA Plug (L031-C301)	
ľ	CONNECTIONS— WATER SUPPLY	Direct Connection to Water Main,Inlet G3/4(Bottom)	
Ī	CONNECTIONS-DRAIN	Drain Hose, I.D.≠25mm(Bottom)	1
Ī	HARVESTING SYSTEM	Direct driven Auger	1
İ	ICE DISPENSING SYSTEM	Push Switch and Solenoid (with Select Switch) Portion control by Dispense Switch	
Ī	WATER DISPENSING	Push Switch and Water Valve(with Select Switch)	1
ļ	SYSTEM	Portion control by Dispense Switch	
ļ	COMPRESSOR	Hermetic	-
ļ	CONDENSER	Fin and Tube type, Air—cooled	1
ļ	EVAPORATOR	Tube coiled around Cylinder (Solder Plated)	
L	REFRIGERANT	R290/85g	
L	BIN CONTROL	Mechanical Bin Control (Time Delay Controlled)	
	ICE MAKING WATER CONTROL	Float Switch and Water Valve	
-	PROTECTION	10A Circuit Breaker	
-	REFRIGERANT CIRCUIT PROTECTION	Compressor Internal Thermostat Condensing Temperature detected by Thermistor(Auto—reset)	
-	ICE MAKER PROTECTION	Shutdown by Microprocessor (Manual-reset)	
	PACKAGE	Carton 440mm(W)×655mm(D)×906mm(H)	
	WEIGHT	46kg (Gross: 55kg)	1/2
ſ	ACCESSORIES	Installation Kit, Brush	