
HOSHIZAKI

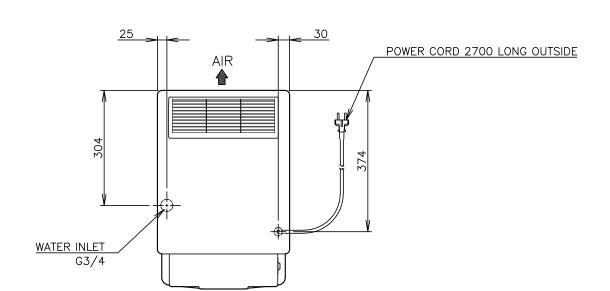

Ambient Temp.: 5-40°C, Water Supply Temp.: 5-35°C

OPERATING CONDITION Water Supply Pressure: 0.05-0.78MPa

Voltage Range: Rated Voltage±6%

*We reserve the right to make changes in specifications and design without prior notice.


1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in


2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.

the instruction and installation manuals provided.

- 3. The amperage and electric consumption are based on measurements with the ice dispensing solenoid off.
- 4. Product Code: L033

L033-C101 L033-C301

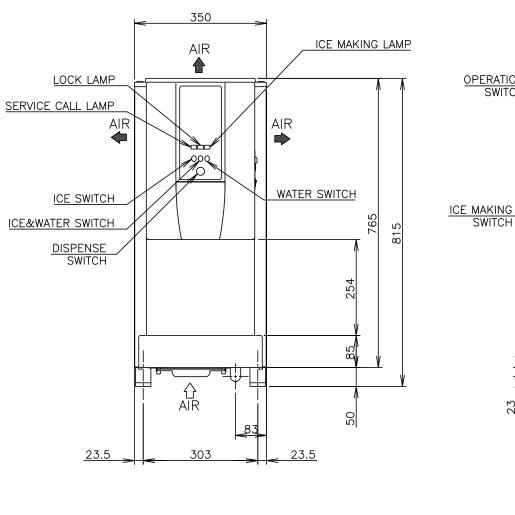

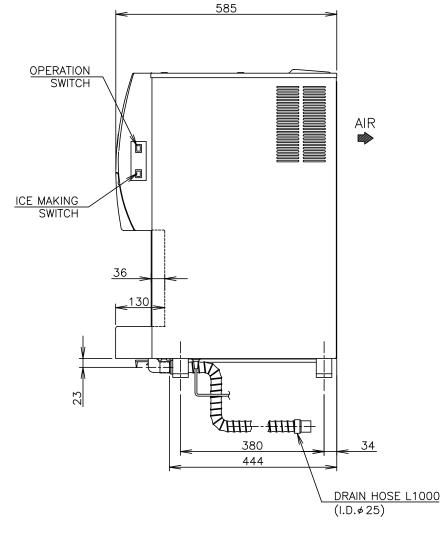

			_
	ITEM	Hoshizaki Cubelet Ice Dispenser	
	MODEL	DCM-120KE-P-HC	
-	POWER SUPPLY	1 Phase 220-240V 50Hz	1
`		Capacity: 0.81kVA (3.4A)	1/2
-	AMPERAGE	Rated: 2.6A Starting: 12.3A	2
	ELECTRIC CONSUMPTION	450W (Power Factor: 72%)	2
f		Approx. 125kg (AT. 10°C, WT. 10°C)	12
	ICE PRODUCTION PER 24h	Approx. 105kg (AT. 21°C, WT. 15°C)	
-		Approx. 85kg (AT. 32°C, WT. 21°C)	-
-	SHAPE OF ICE	Cubelet (Compressed Flake Ice)	-
ļ	STORAGE CAPACITY	Approx. 4.0kg	-
	ICE DISPENSING RATE (40g/CUP)	Approx. 165cups/30min (AT. 10°C, WT. 10°C) Approx. 230cups/1hour(AT. 10°C, WT. 10°C)	
		Approx. 154cups/30min (AT. 21°C, WT. 15°C)	
		Approx. 209cups/1hour (AT. 21°C, WT. 15°C)	
		Approx. 144cups/30min (AT. 32°C, WT. 21°C)	
-		Approx. 188cups/1hour (AT. 32°C, WT. 21°C)	1
	WATER CONSUMPTION	Approx. 0.125m³(AT. 10°C, WT. 10°C)	
	PER 24h	Approx. 0.105m³(AT. 21°C, WT. 15°C) Approx. 0.085m³ (AT. 32°C, WT. 21°C)	
ŀ	OUTSIDE DIMENSIONS	350mm(W)×585mm(D)×815(~830)mm(H)	1
ŀ	INSULATION FOAM		1
	BLOWING AGENT	HFC-free	
Ī	HEAT REJECTION	780W (AT. 32°C, WT. 21°C)	2
Ī	EXTERIOR	Stainless Steel(Side, Rear)	<u> </u>
-		ABS Molding(Front, Top, Drain Pan)	
	ICE MAKING SYSTEM	Thin ice forming inside Cylinder	
	CONNECTIONS-	Y-Type Connection	
		with CONT. Plug (L033) with UK. Plug (L033—C101)	
	ELECTRIC	with CHINA Plug (L033-C301)	
	CONNECTIONS— WATER SUPPLY	Direct Connection to Water Main,Inlet G3/4(Bottom)	1
Ī	CONNECTIONS-DRAIN	Drain Hose, I.D.∮25mm(Bottom)	1
Ī	HARVESTING SYSTEM	Direct driven Auger	1
	ICE DISPENSING SYSTEM	Push Switch and Solenoid (with Select Switch) Portion control by Dispense Switch	
Ī	WATER DISPENSING	Push Switch and Water Valve(with Select Switch)	1
ļ	SYSTEM	Portion control by Dispense Switch	-
	COMPRESSOR	Hermetic	
	CONDENSER	Fin and Tube type, Air—cooled	1
	EVAPORATOR	Tube coiled around Cylinder (Solder Plated)	
	REFRIGERANT	R290/95g	
	BIN CONTROL	Mechanical Bin Control (Time Delay Controlled)	
	ICE MAKING WATER CONTROL	Float Switch and Water Valve	
	ELECTRICAL CIRCUIT PROTECTION	10A Circuit Breaker	
	REFRIGERANT CIRCUIT PROTECTION	Compressor Internal Thermostat Condensing Temperature detected by Thermistor(Auto—reset)	
	ICE MAKER PROTECTION	Shutdown by Microprocessor (Manual—reset)	
	WEIGHT	56kg (Gross: 65kg)	2
ľ	PACKAGE	Carton 440mm(W)×655mm(D)×1026mm(H)	Ī
Ī	ACCESSORIES	Installation Kit, Brush	1
L	-	,	_