

HOSHIZAKI


ACCESSORIES	Scoop, Installation Kit, Ice Chute
OPERATING CONDITIONS	Ambient Temp.: 1 − 40°C, Water Supply Temp.: 5−35°C Water Supply Pressure: 0.07−0.8MPa (0.7−8bar) Voltage Range: Rated Voltage±6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Product Code: M113−D313

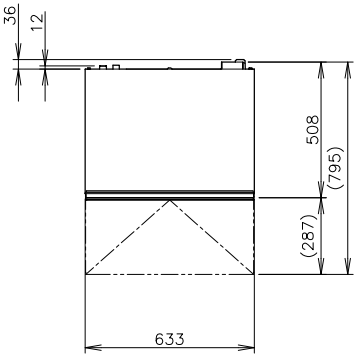

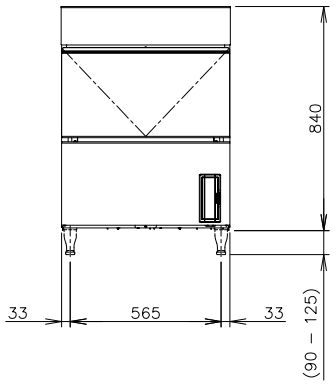

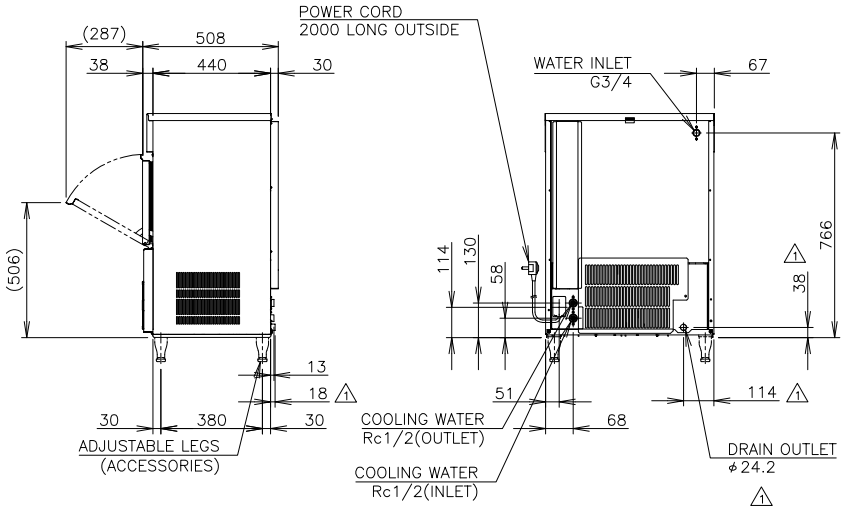

	ITEM	
	MODEL	IM−65WPE−E
	POWER SUPPLY	1 PHASE 220−240V 50Hz Capacity: Min. 0.72kVA (3.0A)
	AMPERAGE	Running: 2.1A Rated Motor: 2.1A Starting: 11A
	ELECTRIC CONSUMPTION	Rated Motor: 280W (Power factor: 60%) (6.7kWh/24h, 14.0kWh/100kg)
	ICE PRODUCTION PER 24h	Approx. 56kg (5mm)/62kg (15mm) (AT. 10°C, WT. 10°C) Approx. 52kg (5mm)/60kg (15mm) (AT. 21°C, WT. 15°C) Approx. 48kg (5mm)/56kg (15mm) (AT. 32°C, WT. 21°C)
	POTABLE WATER CONSUMPTION PER 24h	Approx. 0.16m³ (AT. 10°C, WT. 10°C) Approx. 0.09m³ (AT. 21°C, WT. 15°C) Approx. 0.09m³ (AT. 32°C, WT. 21°C)
	CONDENSER WATER CONSUMPTION PER 24h	Approx. 0.31m³ (AT. 10°C, WT. 10°C) Approx. 0.47m³ (AT. 21°C, WT. 15°C) Approx. 0.82m³ (AT. 32°C, WT. 21°C)
	SHAPE OF ICE	Cube Approx. 28 x 28 x 32mm
	FREEZE CYCLE TIME	Approx. 26min (AT. 21°C, WT. 15°C)
	ICE PRODUCTION PER CYCLE	Approx. 1.03kg/42pcs.(5φ) (AT. 21°C, WT. 15°C)
	MAX STORAGE CAPACITY	Approx. 26kg (Bin Control Setting Approx. 18kg)
	OUTSIDE DIMENSIONS	633mm (W) x 506mm (D) x 840mm (H)
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear)
	INSULATION	Polyurethane Foam
	INSULATION FOAM BLOWING AGENT	Water Blown
	CONNECTIONS − ELECTRIC	X−Type Con. (with CONT. Plug)
	CONNECTIONS − WATER SUPPLY	Inlet G3/4 (connected at rear side)
1	CONNECTIONS−DRAIN	Outlet φ24.2 (connected at rear side)
	CONNECTIONS − COOLING WATER	Inlet Rc1/2 (connected at left side) Outlet Rc1/2 (connected at left side)
	ICE MAKING SYSTEM	Cell type
	HARVESTING SYSTEM	Hot Gas Defrost
	COMPRESSOR	Hermetic
	CONDENSER	Tube and Tube type , Water−cooled
	HEAT REJECTION	430W (370kcal/h) (AT. 32°C, WT. 21°C)
	EVAPORATOR	Tin−plated Copper Tube on Sheet and Cells
	REFRIGERANT CONTROL	Capillary Tube
	REFRIGERANT CHARGE	R290/110g
	ICE MAKING CONTROL	Thermistor, Timer (Controller Board)
	HARVESTING CONTROL	Thermistor (Controller Board)
	BIN CONTROL	Microswitch (with Time Delay) (Controller Board)
	ICE MAKING WATER CONTROL	Timer, Water Pan's Movement (Controller Board)
	ELECTRIC CIRCUIT PROTECTION	Class I Appliance, 5A Fuse
	COMPRESSOR PROTECTION	Auto−reset Overload Protector
	ICE MAKER PROTECTION	Interlock by Controller Board
1	WEIGHT	49kg (Gross 59kg)
	PACKAGE	Carton 735mm (W) x 570mm (D) x 1012mm (H)

HOSHIZAKI CUBE ICE MAKER IM−65WPE−E

APPROVED	CHECKED	DESIGNED	DRAWN	SCALE	
T.HUMPHREYS	Y.TORII	J.DARLINGTON	R.UEDA	1/20	TRIGONOMETRY
T.HUMPHREYS J.DARLINGTON	1	2024.12.11	DATE	DRAWING NO.	SYMBOL
APPROVED DESIGNED	SYMBOL	DATE	2024.11.11	D40052	1